

### RL 4500 EQUIPO PROFESIONAL DE RECTIFICADO



Rectificado de Tambores



MODELO RL 4500  
RECTIFICADOR DE DISCOS Y  
TAMBORES CON JUEGO  
ESTÁNDAR DE ACCESORIOS



Kit Opcional de adaptadores  
para camión 1-7/8"




Kit Opcional de  
adaptadores especiales



### CARACTERÍSTICAS

Overall Height - Mounted On Bench:	59" / 1499 mm.
Floor Space Needed - Width:	48" / 1219 mm.
Floor Space Requirements - Depth:	35" / 889 mm.
Spindle To Floor - Mounted On Bench:	38" / 965 mm.
Electrical Requirements Standard:	115/230 VAC, 50/60 Hz, Single-Phase, 20 Amps
Spindle Motor:	1 HP, 115/230 VAC, 50/60 Hz.
Spindle Travel:	6-7/8" / 175 mm.
Spindle Speed - Inner Groove:	100 RPM
Spindle Speed - Outer Groove:	200 RPM
Spindle Feed Speed Infinitely Variable - Min:	0.002 Inch Per Revolution (0.05 Mm/Rev)
Spindle Feed Speed Infinitely Variable - Max:	0.020 Inch Per Revolution (0.50 Mm/Rev)
Cross Feed Speed - Manual Fine:	0.002 Inch Per Revolution (0.05 Mm/Rev)
Cross Feed Speed - Manual Course:	0.01 Inch Per Revolution (0.250 Mm/Rev)
Handwheel Graduations:	0.002 / 0.050 mm.
Maximum Brake Rotor Diameter:	15" / 381 mm. (16" / 457 mm. available July, 2009)
Maximum Brake Rotor Thickness:	1-7/8" / 48 mm.
Brake Drum Diameter - Min:	8" / 152 mm.
Brake Drum Diameter - Max:	28" / 711 mm.
Maximum Drum Depth:	6-7/8" / 175 mm.
Maximum Load:	120 Lbs. / 54 Kg.
Shipping Weight - With Bench & Standard Tools:	590 lbs. / 268 kg.

### TORNO PULIDOR DE DISCOS MONTADOS EN CALIPER

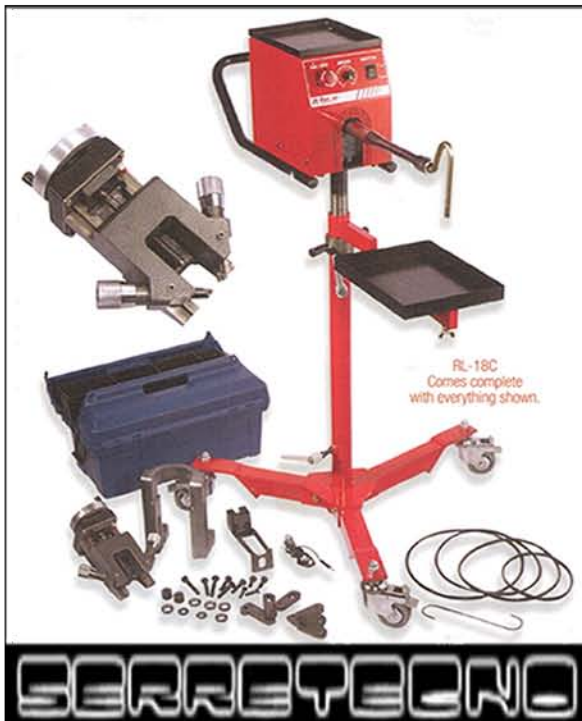

MAX ESPESOR DE ROTOR 1 5/8"  
MAX DIÁMETRO DE ROTOR 13 1/2"



PARA MAYOR INFORMACIÓN  
SOLICITE SU CATALOGO  
RANGER